

BACKER ROD & SEALANT

16 GA. x 1 1/2\"/>


PROVIDE GAP EQUIVALENT TO ANTICIPATED FRAME DRIFT

LIGHT GAGE METAL BACKER AS REQ'D

BACKER ROD & SEALANT

PROVIDE GAP EQUIVALENT TO ANTICIPATED FRAME DRIFT

PLANS
N.T.S.

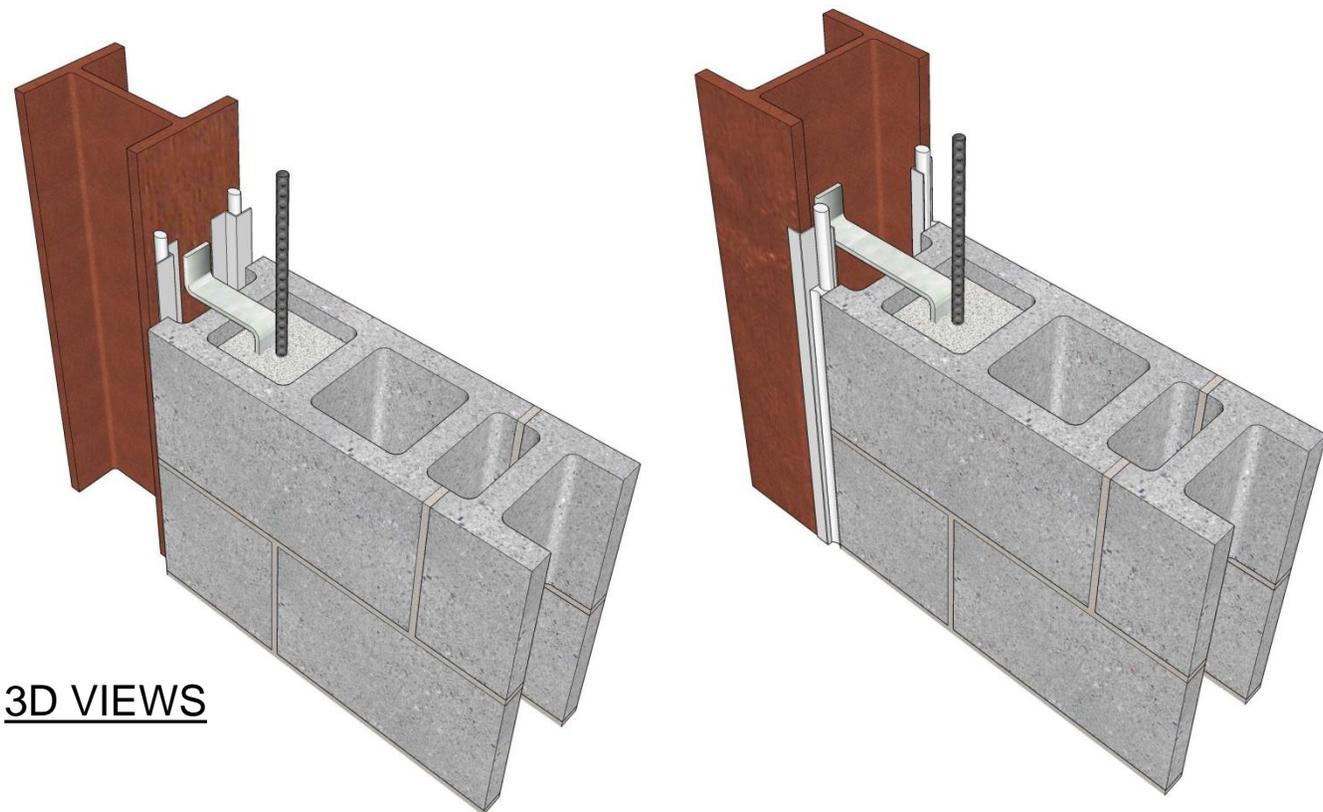

3D VIEWS

NOTES:

1. FOR FIRE-RATED CONSTRUCTION, USE FIRE-RATED SEALANT
2. FIREPROOFING FOR STEEL NOT SHOWN
3. APPLIES TO TYPE I AND TYPE II HYBRID
4. TYPE III HYBRID WOULD REQUIRE FULL BEARING AT STEEL INTERFACES WITH COLUMNS & BEAMS

COLUMN CONNECTION DETAILS OPTION 1

DETAIL 02.120.1101

REV. 10/15/08

International Masonry Institute



800-IMI-0988 www.imiweb.org

© 2011 INTERNATIONAL MASONRY INSTITUTE